

SCP 3362 Trimming Potentiometer



RoHS

Features

Single turn, cermet and sealed, industrial use
9 terminal types

Electrical Characteristics

Standard Resistance Range	10 Ω - 2M Ω
Resistance Tolerance	±10%
Terminal Resistance	≤1% R or 2 Ω
Contact Resistance Variation	CRV ≤ 3 Ω or 3%R
Insulation Resistance	RI ≥ 1G Ω (100Vac)
Withstand Voltage	500V (DC or AC climax)
Effective Electrical Travel	≥70% of mechanical travel

Environmental Characteristics

Rated Power	0.5W@70°C, 0W@125°C
Temperature range	-55°C ~+125°C
Temperature Coefficient	±250ppm / °C, ±100ppm / °C
Collision	390m/s ² , 4000times, ΔR ≤ ±1%R
Temperature Variation	-55°C, 30min, +125°C, 30min 5 cycles; ΔR ≤ 5%R; Δ(Uab/Uac) ≤ ±5%
Vibration	10~500HZ, 0.75mm, 6h, ΔR ≤ ±5%R, Δ(Uab/Uac) ≤ ±7.5
Electrical Endurance at 70°C	0.5W, 1000h; ΔR ≤ 10%R; RI ≥ 1G Ω
Electrical Endurance	200 cycles, ΔR ≤ 10%R CRV ≤ 3%R or 5 Ω

Physical Characteristics

Total mechanical travel	240° ± 10°
Starting Torque	≤ 35mN.m
Standard package	50pcs/tube


How to order

SCP-3362 W- 103
series style resistance code

Standard resistance


code	Resistance (Ω)
101	100
201	200
501	500
102	1,000
202	2,000
502	5,000
103	10,000
203	20,000
503	50,000
104	100,000
204	200,000
504	500,000
105	1,000,000

Special resistances are available




semectech.com


Top adjust




Side adjust

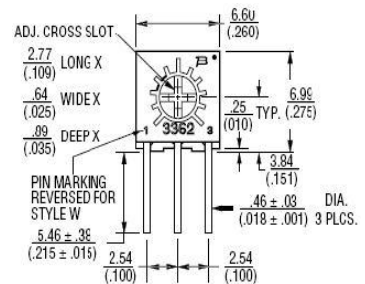


3362S




3362P




3362H




3362X




3362W




3362R




3362U



3362M



3362Z



* The spec is subject to change without notice. Please contact us if any further queries.